

Machine Rating

Rated operating capacity (ISO 14397-1)	343 kg
Tipping load (ISO 14397-1)	686 kg
Pump capacity	37.00 L/min
Max. travel speed (low range)	9.8 km/h

Engine

Make / Model	Kubota / D1005-E3B-BC-3
Fuel	Diesel
Cooling	Liquid
Torque at 1425 RPM (SAE J1995 Gross)	62.8 Nm
Number of cylinders	3
Displacement	1001 cm ³
Fuel tank	24.60 L

Weights

Operating weight	1268 kg
Shipping weight	1109 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals
Front auxiliary (standard)	Lateral movement of right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

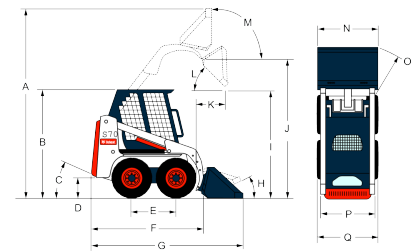
Standard Features

Automatically activated glow plugs	Operating lights, front and rear
Bob-Tach™ frame	Operator cab ¹
Bobcat Interlock Control System (BICS)	Parking brake
Engine/hydraulics system shutdown	Rear and top window
Front auxiliary hydraulics	Seat belt
Cushion suspension seat	Seat bar
Instrumentation	Spark arrestor muffler
Lift arm support	Warranty: 12 months or 2000 hours (whichever occurs first)
23 x 5.70-12, 4-ply, Narrow tyres	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471

Options

Cab enclosure with heating	Keyless kit
10 x 16.5, 10-ply, Heavy duty tyres	Fuel cap locking kit
7 and 14-pin electrical attachment control kit	Rear stabiliser kit
Back up alarm kit	Rear window wiper kit
Cab enclosure kit	Seat belt kit
Fresh air heater kit	Side windows kit
Catalytic purifier kit	Single-point lift kit
Front door kit	Special applications front door kit
Externally removable rear window	Tailgate lock kit
Fire extinguisher kit	4-way flasher / rotating beacon / strobe
Hydraulic bucket positioning kit	Water level sensor kit

Dimensions


(A)	3051.0 mm	(J)	2399.0 mm
(B)	1814.0 mm	(K)	400.0 mm
(C)	25.0°	(L)	34.0°
(D)	141.0 mm	(M)	97.0°
(E)	722.0 mm	(N)	914.0 mm
(F)	1925.0 mm	(O)	1557.0 mm
(G)	2472.0 mm	(P)	752.0 mm
(H)	22.0°	(Q)	901.0 mm
(I)	1934.0 mm		

Attachments

Angle Brooms	Pallet Forks, Standard
Augers	Root Grapples
Boring Units	Snow Blowers
Breakers	Soil Conditioners
Dirt Buckets	Spare Wheels
Dozer Blades	Stump Grinders
Dumping Hoppers	Sweepers
General Purpose (GP)	Tillers
Bucket	Tree Forks
Grapples, Industrial	Trenchers
Landplanes	Utility Forks
Miscellaneous	
Pallet Fork Accessories	