


T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic Specifications

Dimensions


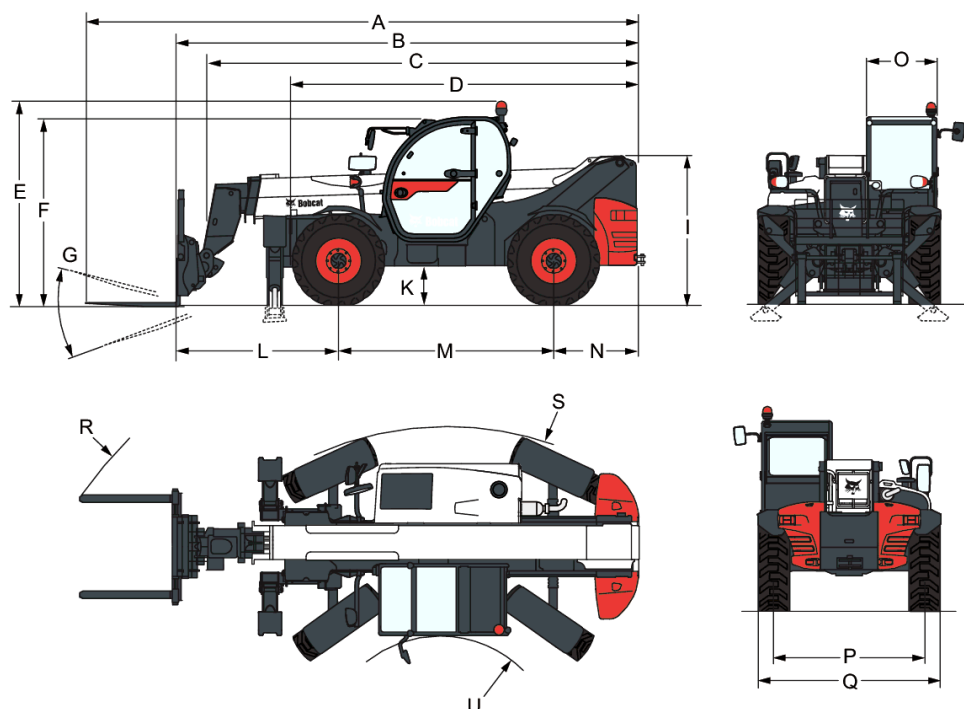


(A) Overall length (to forks tip)	7081.0 mm
(B) Overall length (to forks face)	5876.0 mm
(C) Overall length (to headstock pin)	5541.0 mm
(D) Overall length (to front tyres / Stabilizers (when equipped))	4950.0 mm
(E) Overall height (with rotating beacon)	2586.0 mm
(F) Overall height (with roof wiper)	2430.0 mm
(I) Height back of the machine	1869.0 mm
(K) Ground clearance	422.0 mm
(L) Length - Front axle to forks face	1919.0 mm
(M) Wheelbase	2850.0 mm
(N) Length - Rear axle to machine rear	1107.0 mm
(O) Operator cab outside width	930.0 mm
(P) Track width	1992.0 mm
(Q) Width over standard tyres	2418.0 mm
(S) External turning radius (at tyres)	4150.0 mm
(U) Internal turning radius (cab)	1519.0 mm
(R) External turning radius (with forks spaced 1040 mm ext.)	5696.0 mm
(G) Carriage rotation angle	124.0°

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic
Specifications





Load Charts

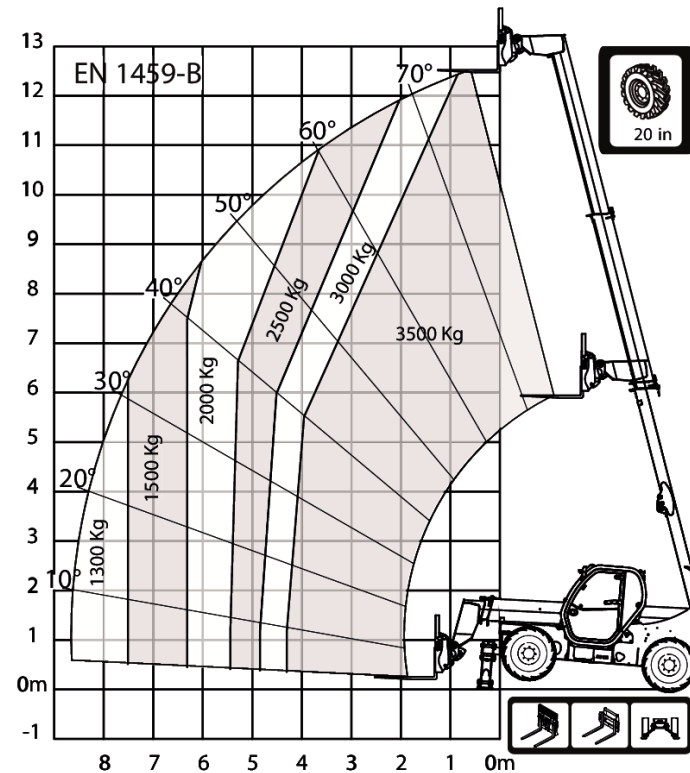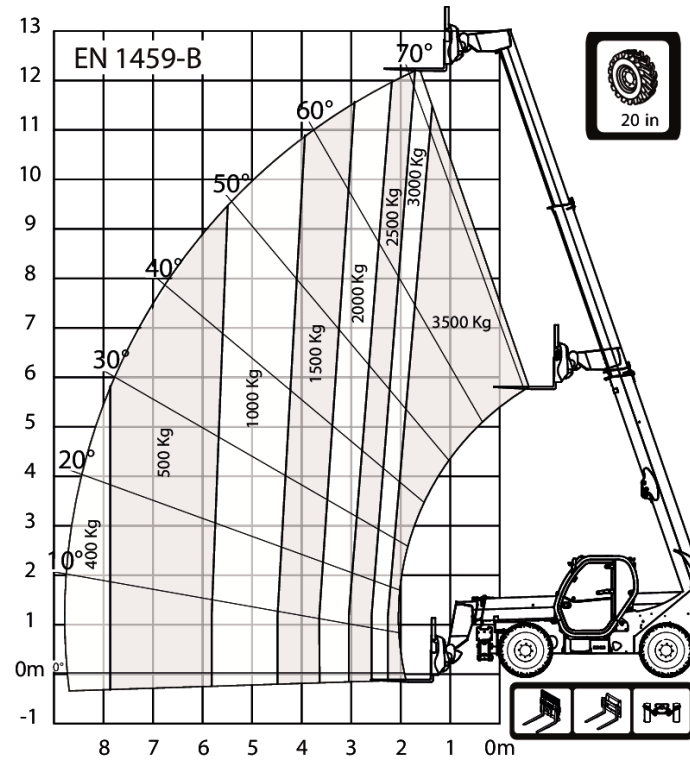

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic
Specifications




Load Charts

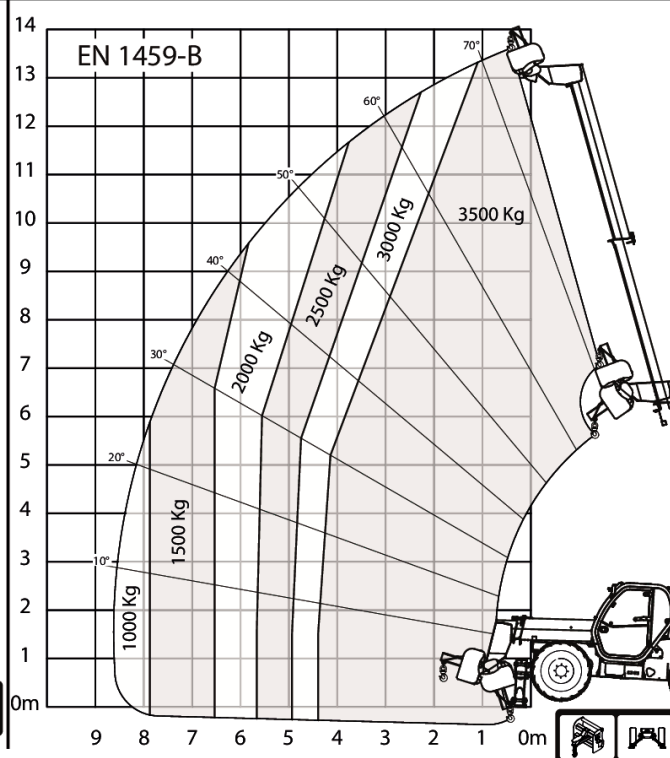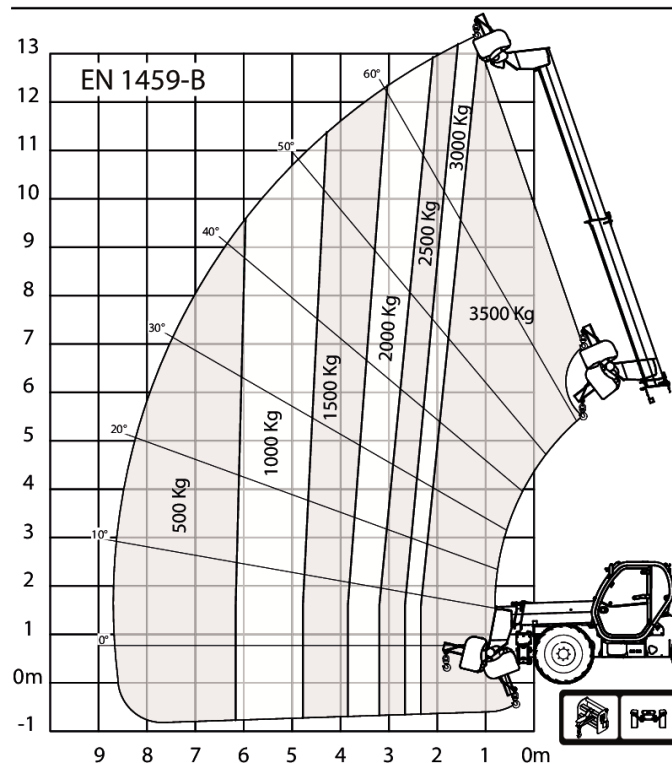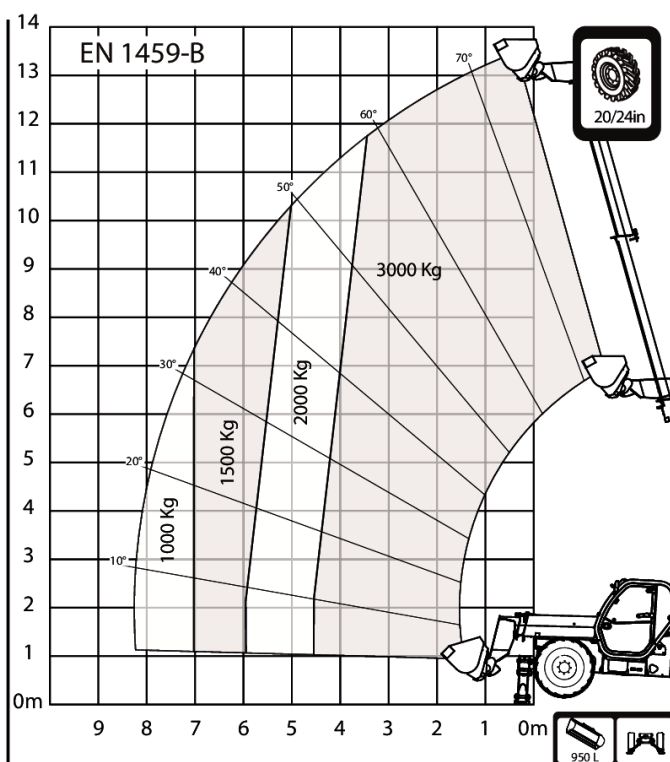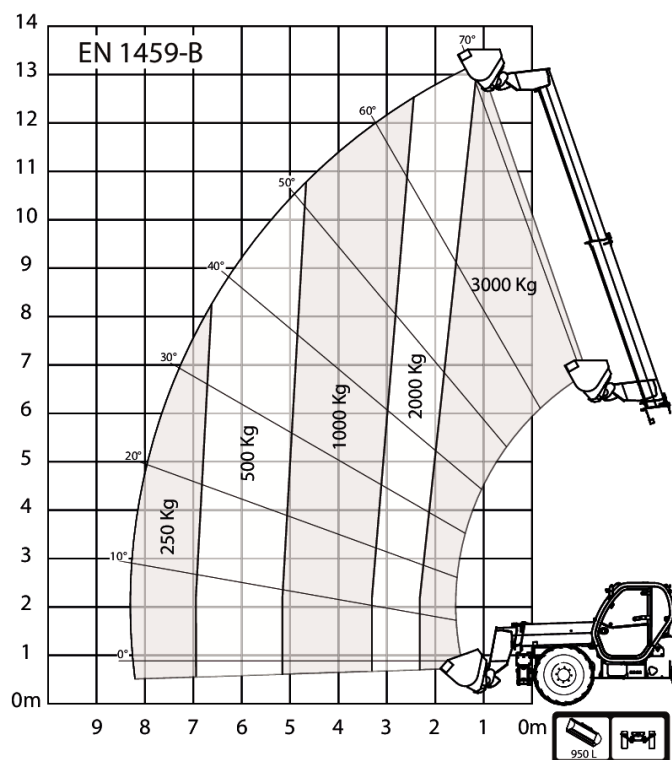

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic
Specifications

Load Charts

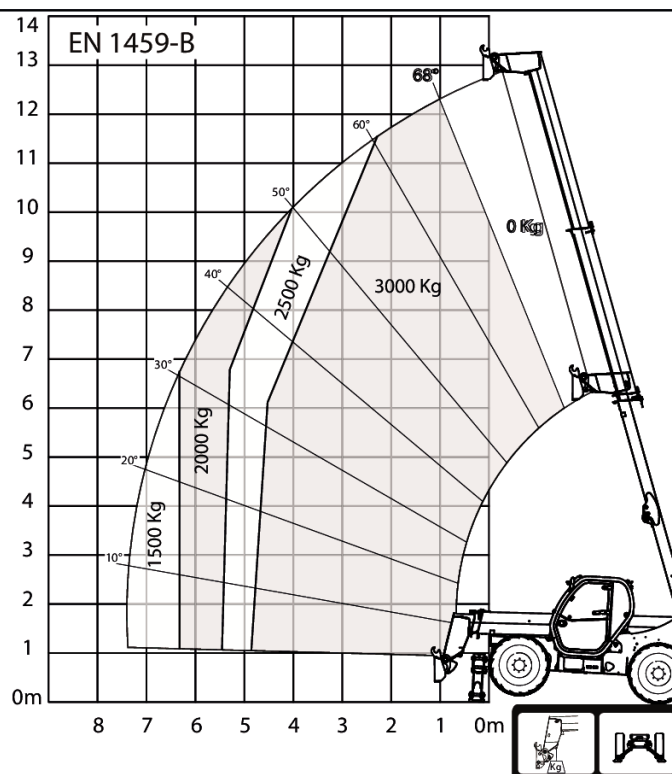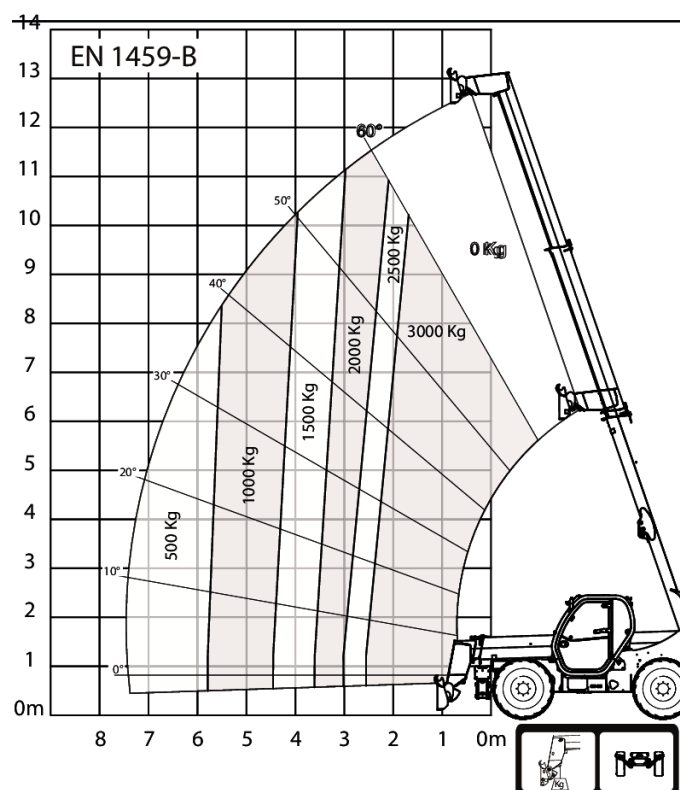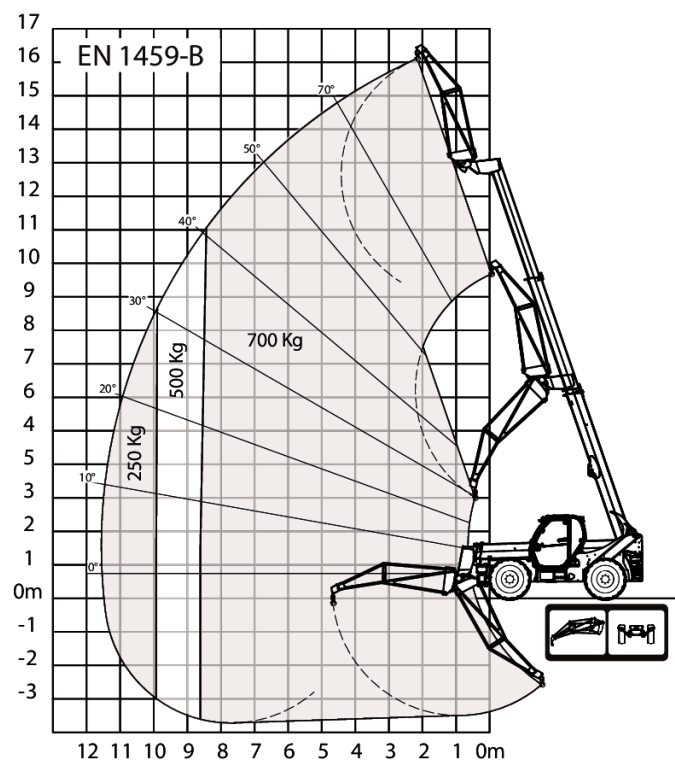

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic Specifications

Performance

Tilt Breakout force	12300 daN
Drawbar pull (20" tyres)	5700 daN
Drawbar pull (24" tyres)	4900 daN
Max. gradeability (20" tyres)	24.0°
Max. gradeability (24" tyres)	24.0°
Max. gradeability with rated load (20" tyres)	24.0°
Max. gradeability with rated load (24" tyres)	23.0°
Rated capacity	3500 kg
Capacity (at max. height on tyres)	3000 kg
Capacity at max. reach (20" tyres)	400 kg
Capacity at max. reach (24" tyres)	400 kg
Capacity at max. height on stabilizers	3500 kg
Capacity at max. reach on stabilizers	1300 kg
Lifting height (20" tyres)	12242.0 mm
Lifting height (24" tyres)	12326.0 mm
Lifting height on stabilizers (20" tyres)	12468.0 mm
Lifting height on stabilizers (24" tyres)	12552.0 mm
Max. reach (20" tyres)	8764.0 mm
Max. reach (24" tyres)	8690.0 mm
Max. reach on stabilizers (20" tyres)	8760.0 mm
Max. reach on stabilizers (24" tyres)	8600.0 mm
Reach at max height on tyres (20" tyres)	1607.0 mm
Reach at max height on tyres (24" tyres)	1520.0 mm
Leveling - Boom lift angle < 50°	4.0°
Leveling - Boom lift angle > 50°	2.0°
Side shift - Boom down Retracted	220.0 mm
Side shift - Boom at max reach Extended	740.0 mm
Side shift - Boom up 50° Retracted	800.0 mm
Side shift - Boom up 50° Extended	1800.0 mm
Side shift - Boom max angle Extended	950.0 mm

Cycle times

Boom raising	14.0 s
Boom lowering	8.5 s
Boom extension	18.0 s
Boom retraction	11.5 s
Crowding	5.0 s
Dumping	4.5 s

Weights

Unladen weight (20" tyres)	8630 kg
Unladen operating Weight (20" tyres)	8810 kg
Unlade operating Weight on front axle (20" tyres)	3980 kg
Unladen operating Weight on rear axle (20" tyres)	4830 kg
Unladen weight (24" tyres)	8730 kg
Unladen operating Weight (24" tyres)	8910 kg
Unlade operating Weight on front axle (24" tyres)	4030 kg
Unladen operating Weight on rear axle (24" tyres)	4880 kg
Max ground Pressure on tyres-hard soil	12.0

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic Specifications

Max ground Pressure on stabs 12.0

Engine

Make / Model	PERKINS / 1104D-44TA
Fuel	DIESEL
Cooling	WATER
Rated power (ISO 14396)	74.0 kW
Rated speed	2200.0 RPM
Maximum torque at 1400 rpm	410.0 Nm
Number of cylinders	4.0
Displacement	4.40 L
Bore	105.0 mm
Stroke	127.0 mm
Lubrication	Gear pump pressure
Crankshaft Ventilation	Open breathing
Air filter	Dry replaceable cartridge with safety element
Ignition	Diesel compression

Electrical

Alternator	90 A
Battery	110.0
Starter	3.2 kW

Hydraulic System

Pump type	Gear pump with LS valve
Pump capacity	100.00 L/min
Relief valve pressure setting	250.00 bar
Control valve type	Open center with flow sharing & flow compensators technology
Hydraulic filter specs	Full flow filtration
Auxiliary flow front	65.00 L/min

Drive system

Transmission	Hydrostatic with electronic regulation
Main Drive	Hydrostatic motor

Traction

Standard Tyres	405/70-20 16PR TM R4
Max speed - turtle mode (24" / 20")	8,5 / 7
Max speed - rabbit mode (24" / 20")	30 / 26

Optional Tyres

CAMSO 400/80-24 / 20PR TM R4
MICHELIN 400/80-24 162A8 IND TL POWER CL
DUNLOP 405/70R24 168A2 152J MPT SPT9

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopic Specifications

Brakes

Engine Braking	Hydrostatic
Parking and Emergency brake	Passive brake
Service Brake	Oil immersed discs

Steering

Steering Pump	Priority valve on pump
Steering Mode	2 wheel steering / 4 wheel steering / Crab-steering

Fluid Capacities

Axles front/rear	8,2/9,1
Gear box	0.80 L
Cooling system with heater	15.00 L
Engine oil with filter	8.50 L
Fuel tank	145.00 L
Hydraulic tank	76.00 L
Hydraulic system	155.00 L

Fluid Specifications

Coolant	Ethylen Glycol Mix 50:99
Engine Oil	""-30°C to 35°C : SAE10W30 -15°C to 45°C : SAE15W40 -40°C to 30°C : SAE5W30 -10°C to 20°C : SAE20W20 "
Fuel	Diesel or fuel
Brake Fluid	None. Brakes use hydraulic system pressure
Hydraulic Fluid	MS68
Transmission Oil	ELF SF3 / TOTAL DYNATRANS FR
Grease for hinges and boom gliders	TOTAL MULTIS EP2

Controls

Engine	Foot accelerator pedal
Starting	Key-type starter switch and shutdown.
Front auxiliary	Variable thumbwheel on joystick
Boom raising / lowering	Joystick electronic
Boom extension /retraction	Variable thumbwheel on joystick
Service brake	Pedal-activated wet multi-disk on front axle
Secondary brake	Passive brake
Parking brake	Passive brake
Steering	Proportional hydraulic steering via a conventional steering wheel
Speed range and Forward/reverse drive	Switch for hydrostatic motor and switch on joystick or lever for FNR
Steering modes	Button and screen for selection
Auxiliary pressure release	Standard coupler + pressure release on control valve spool
Eco mode	Eco mode switch
SHS mode	SHS mode switch

Instruments

Instruments

T35-130SLP 100 IIIA R-Series Telescopic Handler

Telescopes Specifications

- Gauges
 - Engine RPM
 - Total operating hours
 - Job hours
 - Boom angle
 - Vehicle speed
 - Fuel gauge
 - Engine coolant temperature gauge
- Indicators
 - Front and rear wheel alignment status on screen
 - Headlight full beam
 - Headlight low beam
 - Position lights
 - Left and right turn
 - Trailer turn
 - Parking brake
 - Longitudinal stability level
 - Windscreen wipers
 - Work lights
 - Flashing warning light
 - Hazard warning lights
 - Gear Speed choice
 - Hydraulic function lock
 - Rear fog lights
 - Heater fan
 - Hydraulic fluid over-temperature
 - Engine coolant over-temperature
 - Low oil pressure
 - Battery not charging
 - Longitudinal stability alarm

Serviceability

Serviceability

- Access through the side engine cover and access panel:
 - Air cleaner
 - Fuel filter
 - Engine oil filter
 - Engine oil dipstick
 - Starter
 - Alternator
- Access within the cab:
 - Glass washer fluid
 - Fuses, diodes and relays
 - ISL control box

Environmental

Whole body vibration (EN 13059)

1.40 ms⁻²